

# ► PAS® filter unit

## Breathing air supply equipment



### Technical specifications

**Housing:** robust, stable housing made of polyethylene

**Dimensions (h x l x d):** 430 x 280 x 162 mm

**Weight:** 4.5 – 6.5 kg

**Maximum capacity:** 760 – 1,080 L/min

**Coalescing filter:** yes

**Active carbon filter:** yes

**Condensate container:** yes

**Maximum inlet pressure:** 16 bar

**Inlet connector:** F3000/3500: 1/4" BSP (female)  
 F5000/5500: 1/4" BSP (female)

**Outlets:** 3 / 5 x CEJ

**Unit outlet air conformity:** NF EN 12021

**Options:** pre-filter for heavy-dirty air

### Product description


When connected to a high pressure compressed air network or a breathing air compressor, the **PAS® filter unit** removes liquid and solid particles, oil vapors and smell. The breathable air produced by the unit is highly compliant with the NF EN 12021 standard requirements.

#### ► Wall-mounted or portable device

The **PAS® filter unit** can be mounted to a wall or stand on the ground. The portable version features a carrying handle, lateral connectors and three legs to be protected against dirt. This also enables good steadiness on uneven surfaces.

#### ► Air pressure manual adjustment

The primary pressure from the line can be easily adjusted on the filter unit using a key. The set pressure is displayed on the manometer directly on the filter.

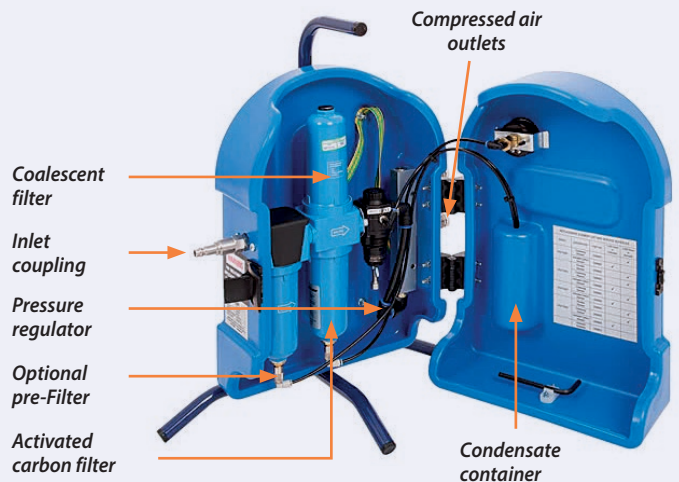

	Model	Capacity	Pré-filtrer	Outlet	Model	Weight	Reference
<b>3000 SERIES</b>	PAS F3000	760 l/min	No	3 x CEJN	Mounted	4.5 kg	33 59 915
	PAS F3000-P		No		Portable	5.0 kg	33 59 916
	PAS F3500		Yes		Mounted	5.5 kg	33 59 921
	PAS F3500-P		Yes		Portable	6.0 kg	33 59 922
<b>5000 SERIES</b>	PAS F5000	1 080 l/min	No	5 x CEJN	Portable	5.0 kg	33 59 923
	PAS F5000-P		Yes		Mounted	5.5 kg	33 59 924
	PAS F5500		Yes		Portable	6.0 kg	33 59 925
	PAS F5500-P		oui		Portable	6.5 kg	33 59 922